



Instruction for replacing the batteries and fluorescent lamp.

Batteries Replacement

Remove the battery door by sliding down the battery cover (see Fig.1) and replace the new batteries (4 x 1.5V AA heavy duty / alkaline battery). Make sure the batteries are orientated correctly on the positive & negative terminals.

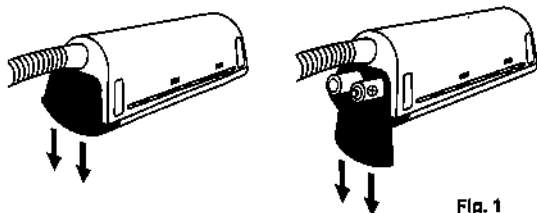


Fig. 1

Fluorescent Lamp Replacement

Press the black button to open the lamp cover (see Fig.2). Turn the fluorescent lamp by 90 degree for removing the lamp (see Fig.3). To fix the new fluorescent lamp (model: F4T5CW) by turning the lamp 90 degree and snap the lamp contact pin into the contact plate (see Fig.4). Ensure the lamp cover is firmly re-assembled.




Fig. 2




Fig. 3




Fig. 4

Caution

Do not put the Grill Light on top of fire.

Limited ninety day warranty

This Grill Light is warranted by Maverick Industries, Inc., to be free from defects in materials and workmanship for a period of ninety (90) days from date of purchase. In the event of any claim under this limited warranty, Maverick Industries, Inc., will repair or replace at its sole option any unit or part(s) thereof, provided such units or part(s) are sent freight prepaid to the Customer Service Department, Maverick Industries, Inc., Grill Light, 94 Mayfield Avenue, Edison, NJ 08837.